

6-QW-36T(270A)




The product has excellent high-current discharge characteristics and is widely used in starting, ignition, and lighting systems. It uses a grid made of lead-calcium alloy, requires no maintenance or water addition during use, has a long power storage time, and a wide applicable temperature range.

PICTURE




DIMENSION

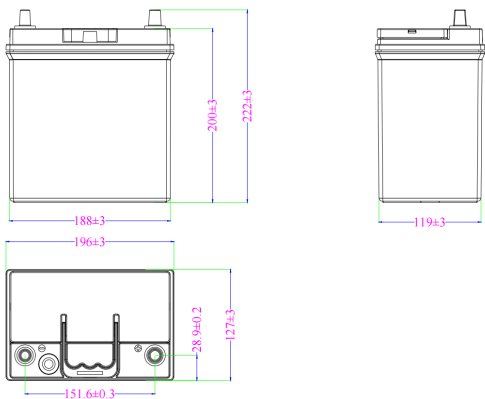

SPECIFICATION

Nominal Voltage/V		12
Weight/±3%kg		8.8
Nominal Capacity/AH		30
Reserve Capacity/min		43
-18℃ CCA/A		270
Max Dimensions	L/mm	195
	W/mm	127
	H/mm	200
	T.H/mm	220
CCA		410
Temperature	Discharge/℃	-40 ~ +60
	Charge/℃	-40 ~ +60
	Store/℃	-40 ~ +60
Optimum temperature/℃		+10 ~ +30
Constant charging current//A		3.0
Constant charging voltage/V		13.5 ~ 13.8
Max charging current/A		9.0
Cover material		PP
Executive standard		GB/T 5008-2023

TERMINAL DIMENSION

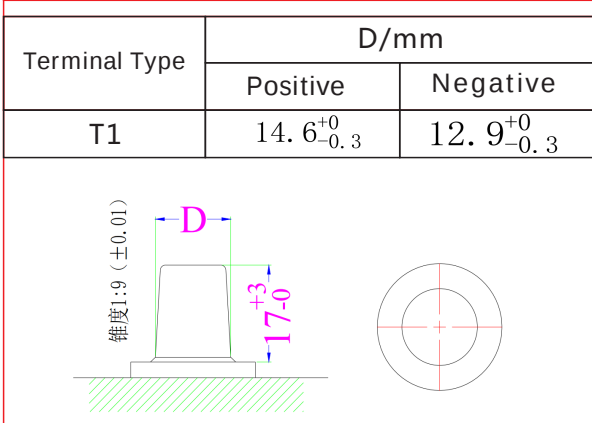

Discharge Curve/25℃

