

6-QW-55(530A) , L2-400MF




The product has excellent high-current discharge characteristics and is widely used in starting, ignition, and lighting systems . It uses a grid made of lead-calcium alloy, requires no maintenance or water addition during use, has a long power storage time, and a wide applicable temperature range.

PICTURE



DIMENSION

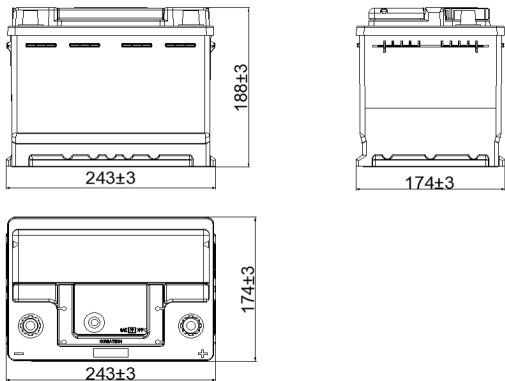


SPECIFICATION

Nominal Voltage/ V		12
Weight/±3%kg		14.8
Nominal Capacity/Ah		58
Reserve Capacity/min		96
-18℃ CCA/A		530
Max Dimensions	L/mm	243
	W/mm	174
	H/mm	188
	TH/mm	188
CCA		650
Temperature	Discharge/℃	-40 ~ +60
	Charging/℃	-40 ~ +60
	Storage/℃	-40 ~ +60
Optimum Temperature/℃		+10 ~ +30
Constant Charging Current/A		5.8
Constant Charging Voltage/V		13.5 ~ 13.8
Max Charging Current/A		17.4
Cover Material		PP
Executive Standard		GB/T 5008-2023

TERMINAL DIMENSION

Terminal Type	D/mm	
	Positive	Negative
T2	19.5 ⁺ _{-0.3} ⁰	17.9 ⁺ _{-0.3} ⁰

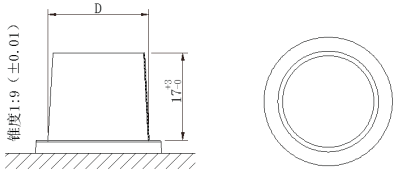

Discharge Curve/25

