

6-QW-100(730A) , N120ZMF




The product has excellent high-current discharge characteristics and is widely used in starting, ignition, and lighting systems. It uses a grid made of lead-calcium alloy, requires no maintenance or water addition during use, has a long power storage time, and a wide applicable temperature range.

PICTURE



DIMENSION

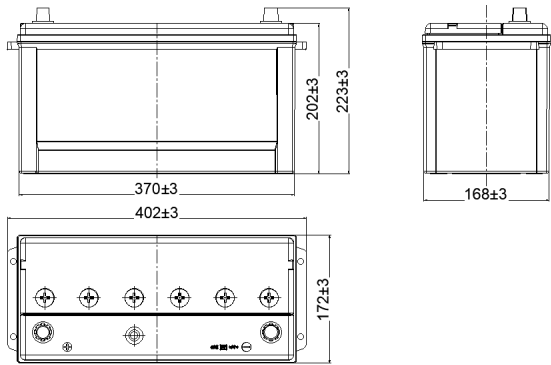

SPECIFICATION

Nominal Voltage/V		12
Weight/±3%kg		25.5
Nominal Capacity/AH		120
Reserve Capacity/min		180
-18℃ CCA/A		730
Max Dimensions	L/mm	402
	W/mm	172
	H/mm	202
	T.H/mm	223
CCA		1000
Temperature	Discharge/℃	-40 ~ +60
	Charge/℃	-40 ~ +60
	Store/℃	-40 ~ +60
Optimum temperature/℃		+10 ~ +30
Constant charging current//A		12.0
Constant charging voltage/V		13.5 ~ 13.8
Max charging current/A		36.0
Cover material		PP
Executive standard		GB/T 5008-2023

TERMINAL DIMENSION

Discharge Curve/25℃

