

6-QW-65H(520A)




The product has excellent high-current discharge characteristics and is widely used in starting, ignition, and lighting systems. It uses a grid made of lead-calcium alloy, requires no maintenance or water addition during use, has a long power storage time, and a wide applicable temperature range.

PICTURE



DIMENSION

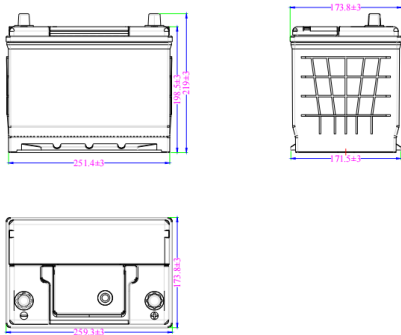


SPECIFICATION

Nominal Voltage/V		12
Weight/±3%kg		16.2
Nominal Capacity/AH		63
Reserve Capacity/min		96
-18℃ CCA/A		520
Max Dimensions	L/mm	258
	W/mm	173
	H/mm	200
	T.H/mm	220
CCA		650
Temperature	Discharge/℃	-40 ~ +60
	Charge/℃	-40 ~ +60
	Store/℃	-40 ~ +60
Optimum temperature/℃		+10 ~ +30
Constant charging current//A		6.3
Constant charging voltage/V		13.5 ~ 13.8
Max charging current/A		18.9
Cover material		PP
Executive standard		GB/T 5008-2023

TERMINAL DIMENSION

Terminal Type	D/mm	
	Positive	Negative
T2	19.5 ⁺⁰ _{-0.3}	17.9 ⁺⁰ _{-0.3}

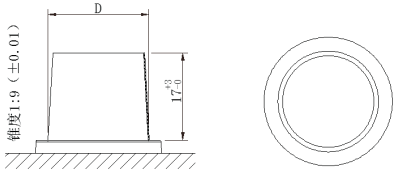

Discharge Curve/25℃

