

# Lithium Iron (LiFePO<sub>4</sub>) Battery

## ALFP-48100H(51.2V 100Ah)

#### Features

**Longer Cycle Life:** Offers up to 10 times longer cycle life and five times longer float/calendar life than lead acid battery, helping it minimize replacement cost and reduce total cost of ownership.


**Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A'drop in' replacement for lead acid batteries.

**Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20~60°C

**Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

**Multi Protocol:** The battery work well with multiple brands of inverters.

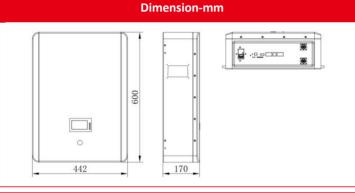



#### Application

- Indoor/outdoor telecom base stations
- Household energy storage system
- Smart transportation backup power supply

Specification		
Basic Parameters	Rated Voltage	51.2V
	Rated Capacity	100Ah
	Rated Energy	5120wh
	Combination Method	16S1P
	Cycle Life	≥6000 cycles @80%DOD
	Self Discharge	1%/months
	Efficiency of Charge	≥97%
	Efficiency of Discharge	≥98%
Charge	Charge Voltage	57.6V
	Charge Current (Recomm.)	20A
	Charge Current (Max.)	100A
Discharge	Discharge Cut-off Voltage	43.2V
	Discharge Current(Recomm.)	100A
	Charge Current(Max.)	100A
	Charge Temperature	0°C to 60°C
Environment	Discharge Temperature	-20°C to 60°C
	Humidity	5% to 95%
Physical Characteristics	IP Class	IP 30
	Case Materia	Metal
	Dimensions ( mm )	600*442*170mm
	Weight ( kg )	50kg
	Others( optional )	WIFI, Bluetooth









# Lithium Iron (LiFePO<sub>4</sub>) Battery


## ALFP-48100H(51.2V 100Ah)

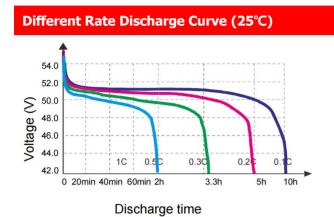

### State of Charge Curve (0.5C, 25°C)

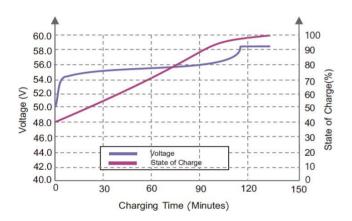


### Different DOD Discharge Cycle Life Curve (0.5C)

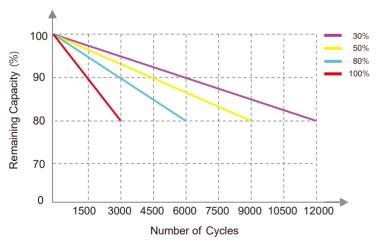





Add: High-tech Industrial Development Zone, Yingde City, Guangdong Province, China Web: www.aokly-battery.com Email: sales@aokly-battery.com

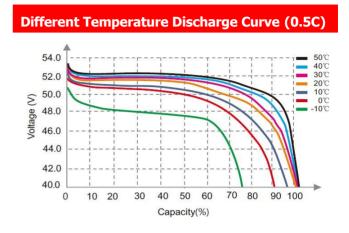

### Charging Characteristics (0.5C, 25°C)

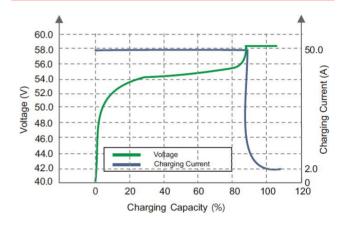

### **Different Temperature Self Discharge Curve**

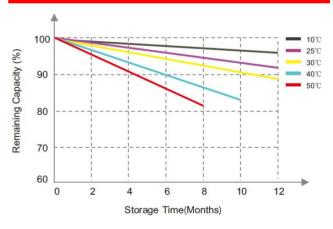

© 2024 AOKLY GROUP. All rights reserved.

Trademarks and logos are the property of AOKLY GROUP and its affiliates unless otherwise noted.Subject to revisions without prior notice.