

E F B Start-Stop Battery Specification

Q-85 EFB




This product is specially designed for cars equipped with advanced start-stop systems. The reinforced grid, high-porosity PE separator, independently developed paste curing patent, etc. make the battery safe and reliable, with excellent high-current discharge performance and charge acceptance capabilities. Good and deep cycle life characteristics.

PICTURE



DIMENSION

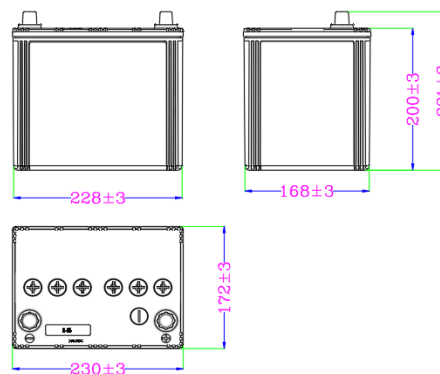


SPECIFICATION

Nominal Voltage/V	12	
Nominal Capacity/Ah	60	
Reserve Capacity/min	100	
-18°C CCA/A	610	
CCA	610	
Internal Resistance/mΩ	5.3	
Weight/ (±3%) Kg	16.5	
Max Dimensions	L/mm	230
	W/mm	172
	H/mm	200
	TH/mm	221
Temperature	discharge/°C	-40-60
	charge/°C	-40-60
	store/°C	-40-60
Optimum temperature/°C	10-30	
Constant charging current/A	6.0	
Constant charging voltage/V	13.5-13.8	
Max charging current/A	18.0	
Cover material	PP	
Executive standard	JB/T 2666-2016	

TERMINAL DIMENSION

Terminal Type	D/mm	
	positive	negative
T2	19.5 ⁺⁰ _{-0.3}	17.9 ⁺⁰ _{-0.3}

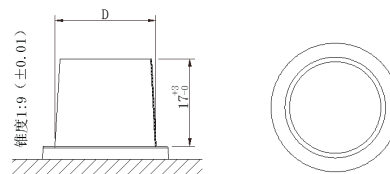

Discharge Curve/25°C

