

EFB Start-Stop Battery Specification

6-QTPE-60(640A), EFBL2




This product is specially designed for cars equipped with advanced start-stop systems. The reinforced grid, high-porosity PE separator, independently developed paste curing patent, etc. make the battery safe and reliable, with excellent high-current discharge performance and charge acceptance capabilities. Good and deep cycle life characteristics.

PICTURE



DIMENSION

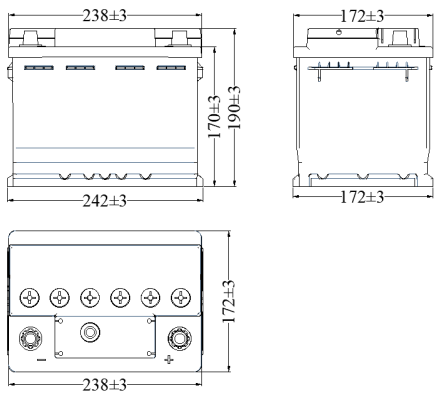


SPECIFICATION


Nominal Voltage/ V		12
Weight/±3%kg		16.9
Nominal Capacity/Ah		60
Reserve Capacity/min		100
-18℃ CCA/A		640
Max Dimensions	L/mm	242
	W/mm	172
	H/mm	190
	TH/mm	190
CCA		700
Temperature	Discharge/℃	-40 ~ +60
	Charging/℃	-40 ~ +60
	Storage/℃	-40 ~ +60
Optimum Temperature/℃		+10 ~ +30
Constant Charging Current/A		6.0
Constant Charging Voltage/V		13.5 ~ 13.8
Max Charging Current/A		18.0
Cover Material		PP
Executive Standard		GB/T 5008-2023

TERMINAL DIMENSION

Terminal Type	D/mm	
	Positive	Negative
T2	19.5 ⁺ _{-0.3} ⁰	17.9 ⁺ _{-0.3} ⁰

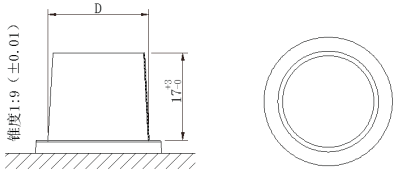

Discharge Curve/25℃

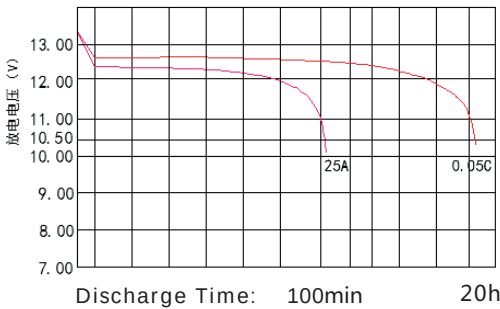

File Serial No.AKL/XC-6-QW-55EFB/01A

Guangdong Aokly Group Co., Ltd.

Production base: Yingde High-tech Industrial
Development Zone, Guangdong Province.
Service hotline: 400-833-9899
Website: <http://www.aokly-battery.com.cn>

Power the green energy future