

E F B Start-Stop Battery Specification

6-QW-80EFB




This product is specially designed for cars equipped with advanced start-stop systems. The reinforced grid, high-porosity PE separator, independently developed paste curing patent, etc. make the battery safe and reliable, with excellent high-current discharge performance and charge acceptance capabilities. Good and deep cycle life characteristics.

PICTURE



DIMENSION

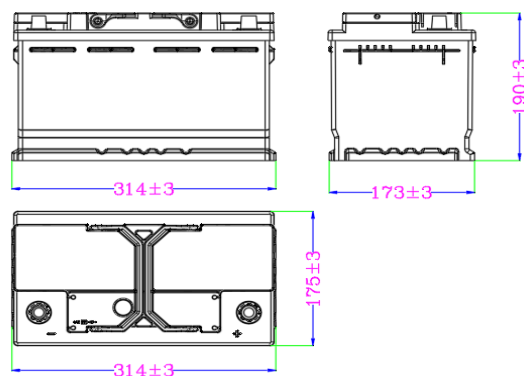


SPECIFICATION

Nominal Voltage/V		12
Nominal Capacity/Ah		80
Reserve Capacity/min		158
-18℃ CCA/A		780
CCA		850
Internal Resistance/mΩ		3.9
Weight/ (±3%) Kg		23.0
最大外形尺寸	L/mm	314
	W/mm	175
	H/mm	190
	TH/mm	190
使用温度	discharge/℃	-40-60
	charge/℃	-40-60
	store/℃	-40-60
Optimum temperature/℃		10-30
Constant charging current/A		8.0
Constant charging voltage/V		13.5-13.8
Max charging current/A		24.0
Cover material		PP
Executive standard		JB/T 2666-2016

TERMINAL DIMENSION

Terminal Type	D/mm	
	positive	negative
T2	19.5 ⁺⁰ _{-0.3}	17.9 ⁺⁰ _{-0.3}

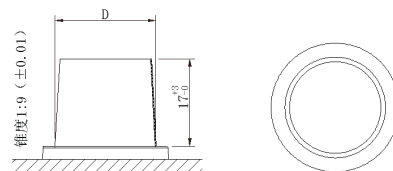

Discharge Curve/25°C

